

FMS CON: /


STATE	PROJECT NO.
MISS.	UPDATE

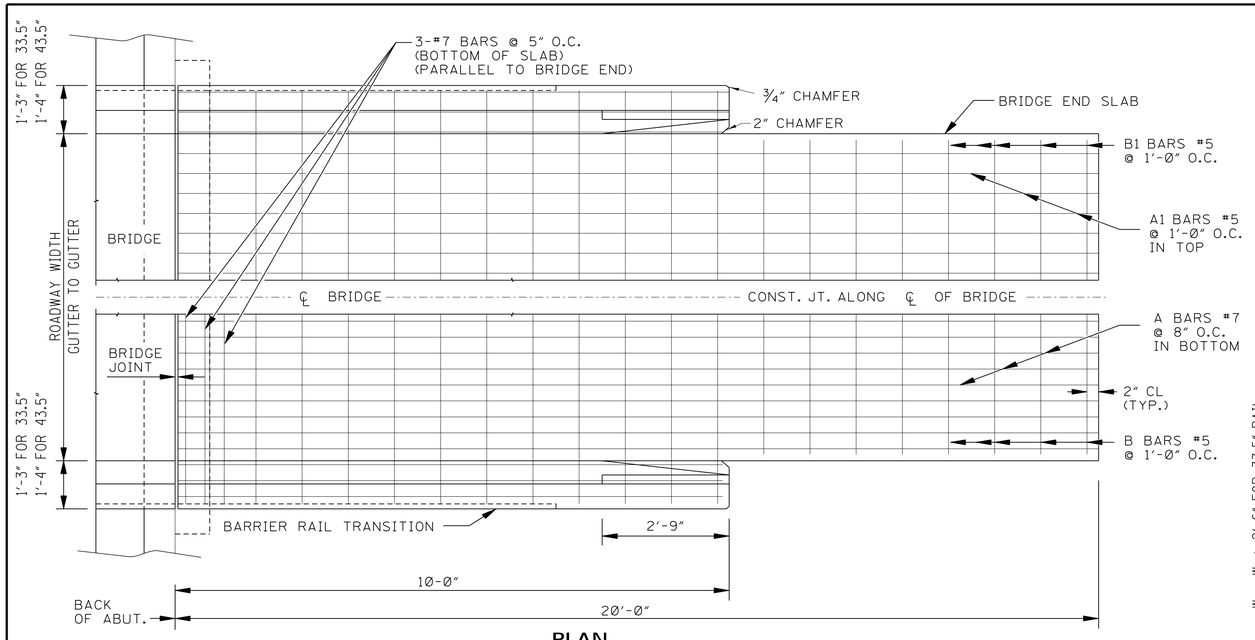


PLAN

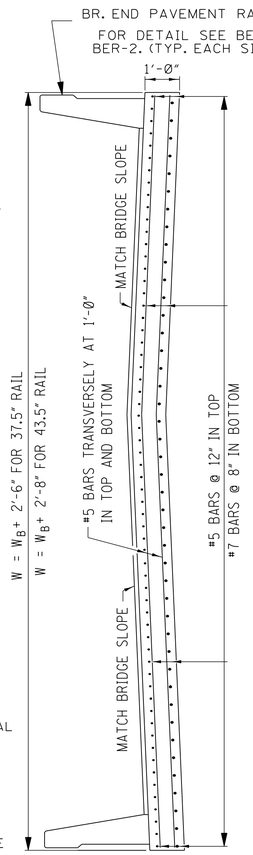


SECTION A–A

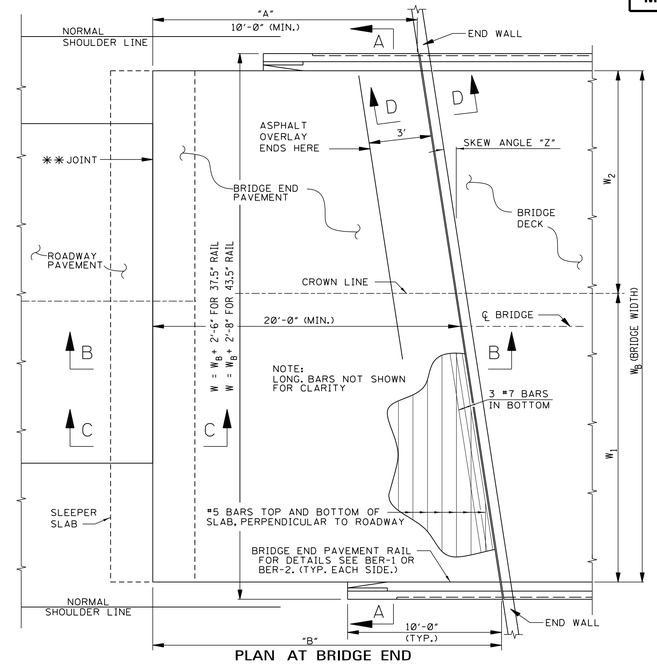

PLAN AT BRIDGE END

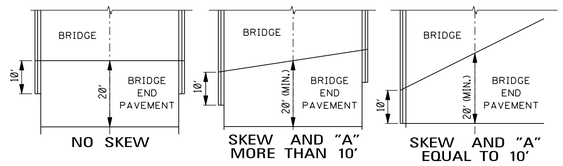

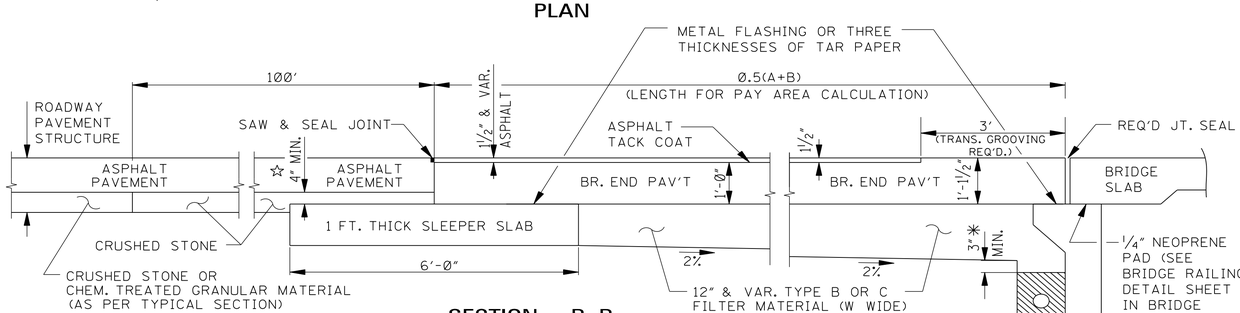


SECTION B–B


☆ NOTE:
WHEN AREA BETWEEN SLEEPER SLAB AND ASPHALT IS LESS THAN 4", ASPHALT SHOULD BE USED INSTEAD OF CRUSHED STONE.

✱ NOTE:
ADJUST AS NECESSARY TO ENSURE PROPER DRAINAGE

✱✱ NOTE:
1" PREMOLDED EXPANSION JOINT SEALED WITH POURED JOINT FILLER (DOWELED). THIS JOINT REQUIRED ONLY IF ROADWAY PAVEMENT IS CONCRETE.

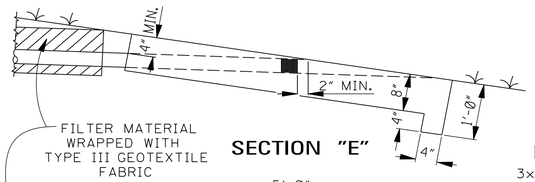


SECTION "E"




DETAIL OF RODENT SCREEN


3x3 GALVANIZED HARDWARE CLOTH 0.063 WIRE OR EQUAL, FORMED TO FIT SNUG INSIDE OF PIPE. (COST ABSORBED)

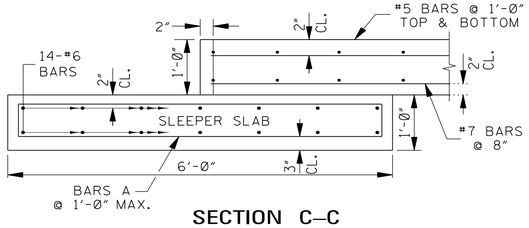


SECTION C–C



SECTION D–D

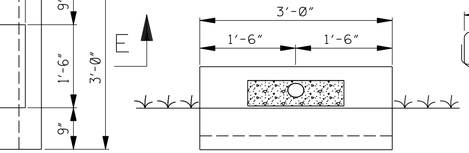

UNDERDRAIN OUTLET APRON DETAIL




BAR BENDING DETAILS

DIMENSIONS ARE OUT TO OUT



LONGITUDINAL WEAKENED PLANE JOINT

WHEN BRIDGE END SLAB IS POURED IN ONE OPERATION

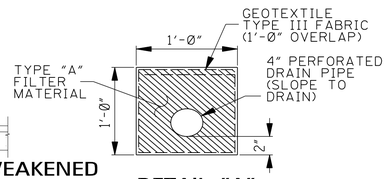

DETAIL "A"

UNDERDRAIN NOTES:
1. 0.363 C.Y. CLASS "C" CONCRETE REQUIRED FOR APRON.
2. SMALL ANIMAL GUARDS SHALL BE REQUIRED ON ALL EXPOSED PIPE OPENINGS BY THE END OF THE WORK DAY INSTALLED.
3. 4" PERFORATED DRAIN PIPE TO BE INSTALLED UNDER THE ROADWAY AND 2' OUTSIDE OF THE SHOULDER. 4" NON-PERFORATED DRAIN PIPE TO BE INSTALLED FOR THE REMAINDER TO THE OUTLET APRON.
4. UNDERDRAIN OUTLETS SHALL BE REQUIRED ON BOTH SIDES OF THE ROADWAY IN NORMAL CROWN SECTIONS AND ONLY ON THE LOW SIDE OF SUPERELEVATED SECTIONS.

GENERAL NOTES:
1. PROVIDE A CONSTRUCTION JOINT AT ℄ BRIDGE FOR 2-LANE BRIDGES AS SHOWN. FOR BRIDGES WITH MORE THAN 2 LANES, MULTIPLE CONSTRUCTIONS JOINTS TO COINCIDE WITH LANE LINES. AT THE OPTION OF THE CONTRACTOR, THE BRIDGE END SLAB MAY BE POURED IN A SINGLE POUR. IF THIS OPTION IS CHOSEN, LONGITUDINAL JOINTS SHALL BE SAWN IN THE SLAB TO COINCIDE WITH LANE LINES.
2. DIMENSIONS "A" AND "B" ARE BASED ON A MID-LENGTH OF 20'-0", EXCEPT IN NO CASE SHALL "A" BE LESS THAN 10'-0".
3. SEE QUANTITY SECTION OF PLANS FOR DIMENSIONS "W", "W_1", "W_2", "A", "B", SKEW ANGLE "Z", AND QUANTITIES.
4. REINFORCEMENT (DEFORMED) MAY BE FURNISHED FULL LENGTH OR MAY BE SPLICED. IF BARS ARE SPLICED, THEY SHALL BE SPLICED NOT LESS THAN 35 DIAMETERS.
5. TRANSVERSE BARS B SHALL BE CONTINUOUS ACROSS JOINTS AND SLAB. WHEN FEASIBLE, USE ONE LENGTH OF BAR TO RUN ACROSS JOINTS AND SLAB, HOWEVER WHERE IT IS NECESSARY TO USE MORE THAN ONE LENGTH OF BAR, BARS SHALL BE SPLICED NOT LESS THAN 35 DIAMETERS.
6. IF TOP LIFT OF ASPHALT IS GREATER THAN 1.5", THE LIFT SHALL BE TRANSITIONED TO 1.5" ACROSS THE LENGTH OF THE BRIDGE END PAVEMENT.
7. THE BRIDGE END PAVEMENT PAY ITEM INCLUDES BRIDGE END PAVEMENT, SLEEPER SLAB, AND METAL FLASHING. ALL OTHER ITEMS SHOWN ON THIS SHEET WILL BE PAID AS INDICATED ELSEWHERE IN THE PLANS.
8. THE FINISHED CROWN OF THE BRIDGE END SLAB SHALL CONFORM TO THE BRIDGE DECK. TRANSITION FROM NORMAL CROWN OF ASPHALT PAVEMENT TO CROWN OF BRIDGE END SLAB SHALL BE MADE IN A DISTANCE OF 100 FEET.
9. CLASS "B" CONCRETE REQUIRED FOR SLEEPER SLAB AND BRIDGE END PAVEMENT. CLASS "AA" CONCRETE MAY BE USED WITH APPROVAL OF THE ENGINEER (NO COST ADJUSTMENT WILL BE MADE).

PLAN
ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

3/18/2026 9:49:17 AM SDBE-1 GEOPAK, DGN

BY | REVISION | DATE

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

BRIDGE END PAVEMENT WITH RAIL, OVERLAY, AND SLEEPER SLAB (NEW CONSTRUCTION)

PROJ. NO.: UPDATE
COUNTY: UPDATE

PRELIMINARY
NOT FOR
CONSTRUCTION

WORKING NUMBER
SDBE-1

SHEET NUMBER
PG

FILE NAME: UPDATE
DESIGN TEAM UPDATE CHECKED UPDATE DATE UPDATE