

STATE	PROJECT NO.
MISS.	UPDATE

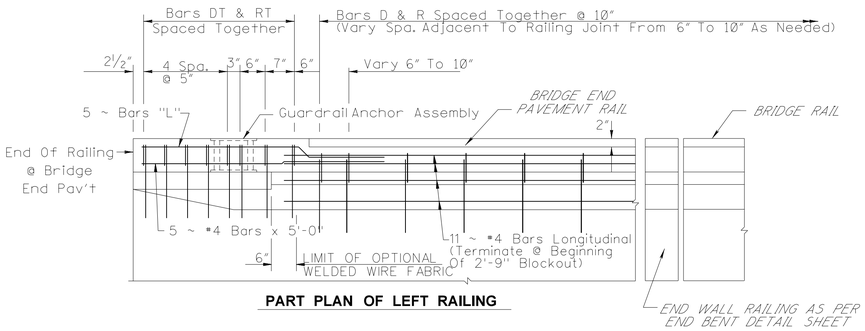


PART PLAN OF LEFT RAILING

(Showing Conventional Reinforcing. See CONSTRUCTION NOTES For Details Of Optional Welded Wire Fabric.)

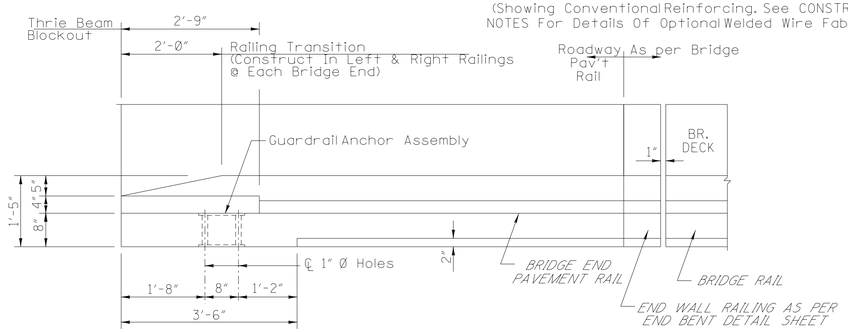


PART PLAN OF RIGHT RAILING

(Showing Concrete Dimensions)

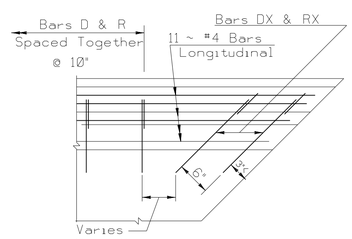

SKEWED PART PLAN OF LEFT RAILING AT BRIDGE END WALL

(Showing Conventional Reinforcing. See CONSTRUCTION NOTES For Details Of Optional Welded Wire Fabric.)



PIPE SLEEVE DETAIL



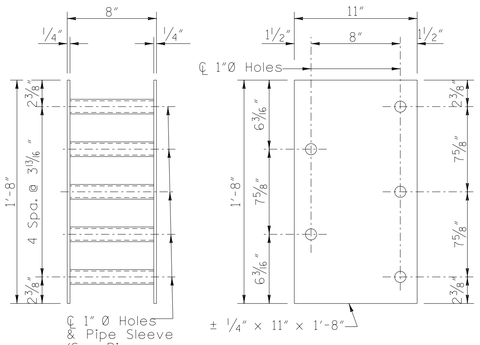


PLATE DETAIL

GUARDRAIL ANCHOR ASSEMBLY

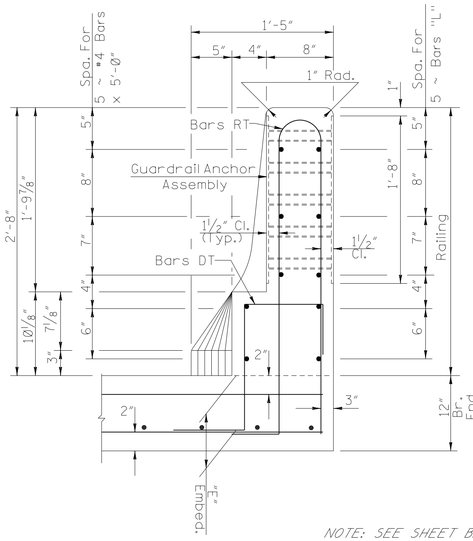


END ELEVATION OF RAILING

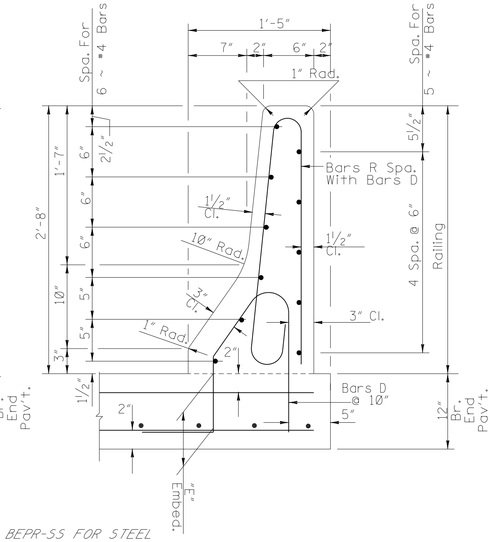


NOTE: SEE SHEET BEPR-55 FOR STEEL DETAILS OF BRIDGE END PAVEMENT

TYPICAL SECTION OF RAILING

NOTE: "E" = Slab Thickness (In.) - 2 Inch.

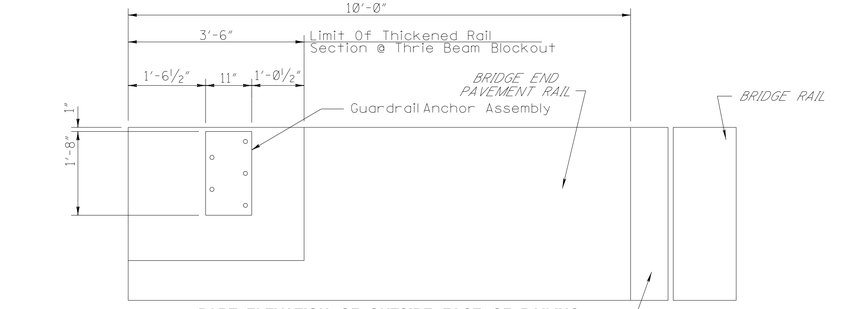


PART ELEVATION OF OUTSIDE FACE OF RAILING

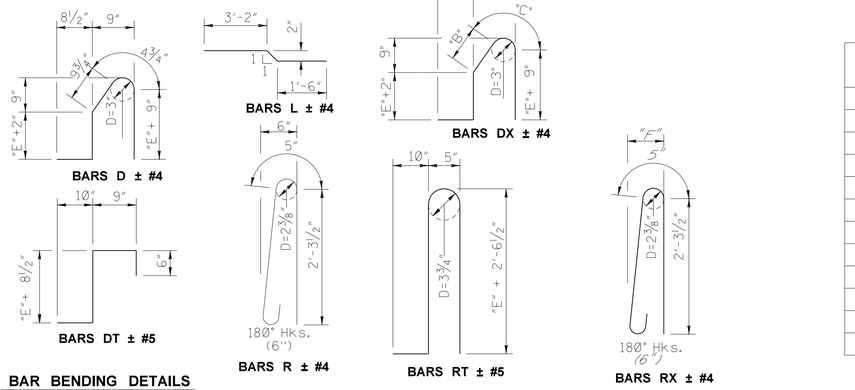

BAR BENDING DETAILS

Dimensions Are Out To Out NOTE:
"E" = Slab Thickness (In.) - 2 Inch.

SKEW (DEG)	BARS DX ~ #4			BARS RX ~ #4
	"A"	"B"	"C"	"F"
Ø	9"	9¾"	5"	6"
5	9"	9¾"	5"	6"
10	9"	9¾"	5"	6"
15	9¼"	10"	5"	6¼"
20	9½"	10"	5"	6¼"
25	10"	10½"	5"	6½"
30	10¼"	10½"	5"	7"
35	11"	11¼"	4¾"	7¼"
40	11¾"	11¾"	4¾"	7¾"
45	1'-0¼"	1'-0¾"	4½"	8½"
50	1'-2"	1'-1¾"	4½"	9¼"
55	1'-3¾"	1'-2½"	4½"	10½"

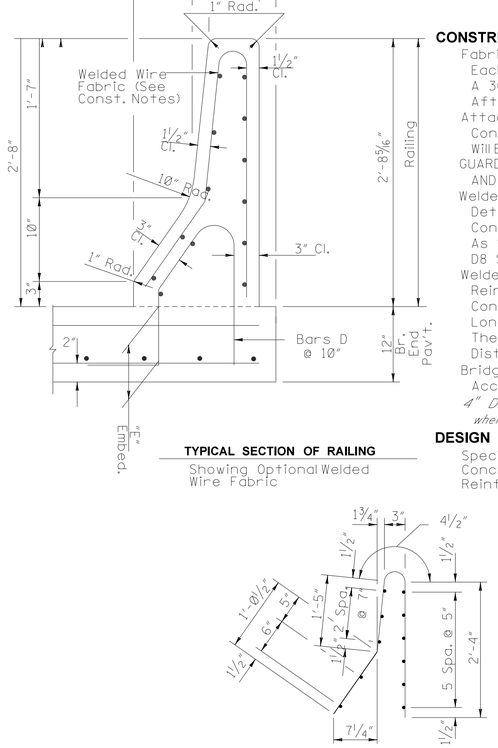

TYPICAL SECTION OF RAILING

Showing Optional Welded Wire Fabric

WELDED WIRE FABRIC

(Optional - See CONSTRUCTION NOTES)

CONSTRUCTION NOTES:

Fabricate Guardrail Anchor Assemblies By Tack Welding Each End Of Pipe Sleeves To Plates. Plates Shall Be ASTM A 36 Steel. Pipes Shall Be ASTM A 120. Galvanize Complete Assemblies After Fabrication Per ASTM A 153.

Attach Assemblies Securely To Forms Prior To Pouring Railing Concrete To Assure That Exposed Surfaces Of The Assemblies Will Be Flush With Concrete Surfaces.

GUARDRAIL ANCHOR ASSEMBLIES SHALL BE INSTALLED IN BOTH LEFT AND RIGHT RAILINGS AT EACH END OF ALL BRIDGES.

Welded Wire Fabric Meeting The Requirements Of ASTM A 497 And Details Shown On This Sheet May Be Used As An Option To Conventional Railing Reinforcing. Longitudinal Wires Shall Be D8 Spaced As Shown In The BAR BENDING DETAILS And Vertical Wires Shall Be D8 Spaced At 4".

Welded Wire Fabric Shall Not Be Used In The 2'-9" Thrie Beam Blockout Reinforcement For The 2'-9" Thrie Beam Blockout Shall Consist Of Conventional Reinforcing As Shown In Details On This Sheet. The Longitudinal Bars Of The Conventional Reinforcing Shall Extend Beyond The 2'-9" Thrie Beam Blockout Into The Welded Wire Fabric A Minimum Distance Of 1'-6".

Bridge End Pavement Rail Shall Be Constructed And Paid For In Accordance With Section 813 Of The Standard Specifications.

4" Diameter weep hole to be placed in bridge end pavement rail where required to reduce ponding.

DESIGN DATA

Specifications.....A.A.S.H.T.O. 1992 & Int. Thru 1995
Concrete.....Class "AA"(4,000 psi)
Reinforcing.....ASTM A 615 Grade 60 (Fy = 60 ksi)

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

32" BRIDGE END PAVEMENT RAIL (12" PAVEMENT)

PROJ. NO.: UPDATE
COUNTY: UPDATE

PRELIMINARY
NOT FOR
CONSTRUCTION

WORKING NUMBER
SDBEPR-1-12

SHEET NUMBER
PG

BY | REVISION | DATE

FILENAME: SDBEPR-1-12.dgn
DESIGN TEAM UPDATE CHECKED UPDATE DATE UPDATE

PLAN
ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

001 00 AMPM DGN FILENAME
MMDDYY