

STATE	PROJECT NO.
MISS.	UPDATE

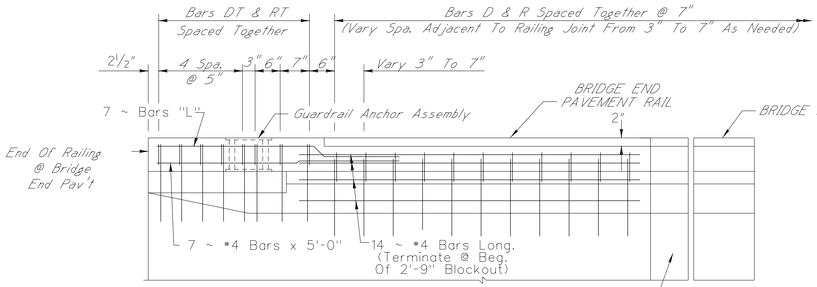


PART PLAN OF LEFT RAILING

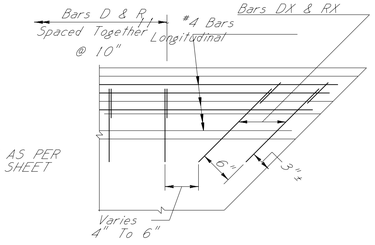


SKEWED PART PLAN OF LEFT RAILING AT BRIDGE END WALL

(Showing Conventional Reinforcing. See CONSTRUCTION NOTES For Details Of Optional Welded Wire Fabric.)

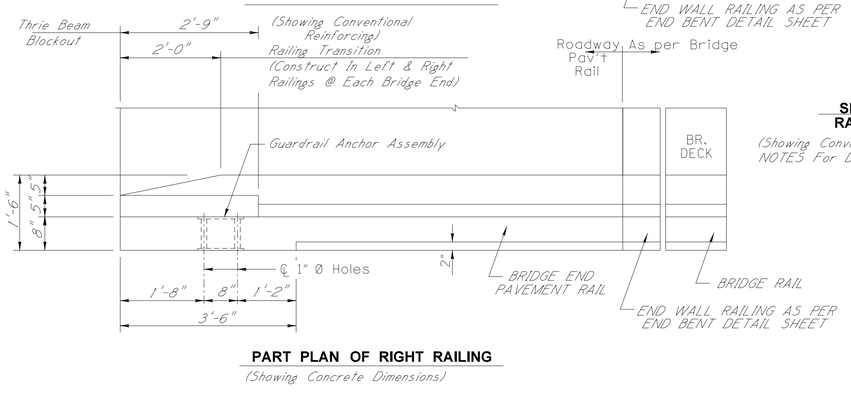

PART PLAN OF RIGHT RAILING


(Showing Concrete Dimensions)

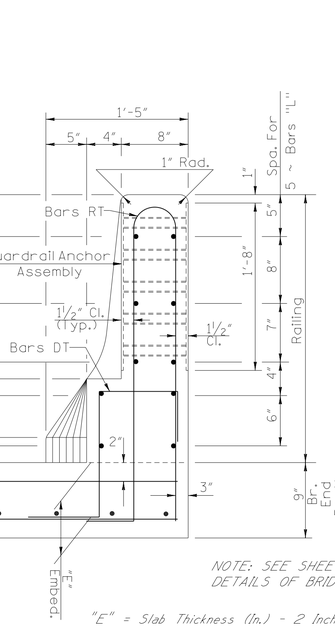

NOTE: SEE SHEET BEPR-55 FOR STEEL DETAILS OF BRIDGE END PAVEMENT


"E" = Slab Thickness (In.) - 2 Inch.

END ELEVATION OF RAILING

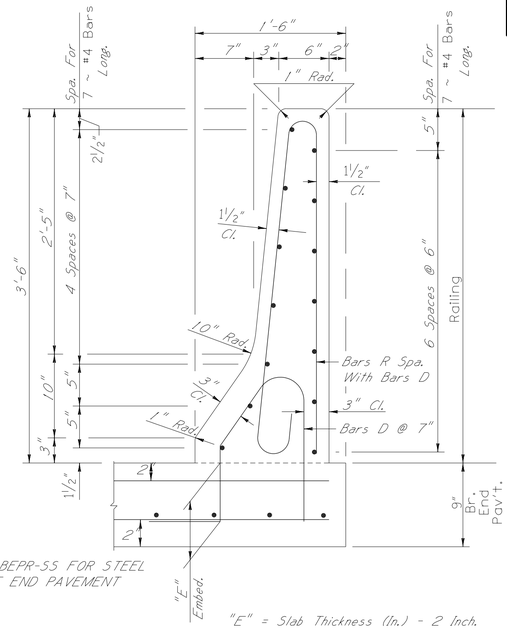


"E" = Slab Thickness (In.) - 2 Inch.

TYPICAL SECTION OF RAILING

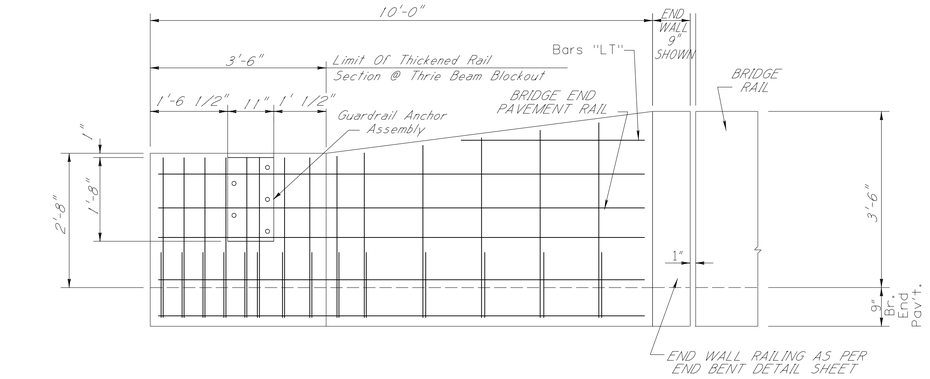

PART ELEVATION OF OUTSIDE FACE OF RAILING



PIPE SLEEVE DETAIL


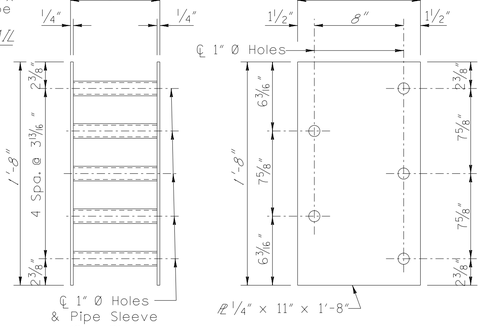


PLATE DETAIL

GUARDRAIL ANCHOR ASSEMBLY

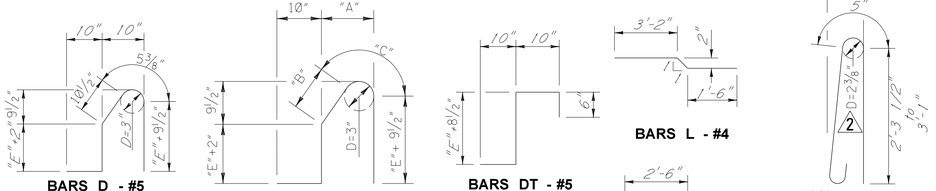

BARS D - #5 | **BARS DX - #5** | **BARS DT - #5** | **BARS L - #4** | **BARS LT - #4** | **BARS R - #5** | **BARS RX - #5** | **BARS RT - #5**

NOTE:
"E" = Slab Thickness (In.) - 2 Inch.

BAR BENDING DETAILS

Dimensions Are Out To Out

SKEW (DEG)	BARS DX ~ #5			BARS RX ~ #5
	"A"	"B"	"C"	"F"
0	10"	10½"	5⅜"	7"
5	10"	10½"	5⅜"	7"
10	10"	10½"	5⅜"	7"
15	10¼"	10½"	5¼"	7¼"
20	10½"	10¾"	5¼"	7½"
25	11"	11¼"	5⅜"	7¾"
30	11½"	11½"	5⅜"	8"
35	1'-0¼"	1'-0¼"	5"	8½"
40	1'-1"	1'-0¾"	4⅞"	9"
45	1'-2"	1'-1¾"	4 13/16"	9¾"
50	1'-3½"	1'- 3"	4⅝"	10¾"
55	1'-5½"	1'-4¾"	4½"	1-0¼"

CONSTRUCTION NOTES:

Fabricate Guardrail Anchor Assemblies By Tack Welding Each End Of Pipe Sleeves To Plates. Plates Shall Be ASTM A 36 Steel. Pipes Shall Be ASTM A 120. Galvanize Complete Assemblies After Fabrication Per ASTM A153.

Attach Assemblies Securely To Forms Prior To Pouring Railing Concrete To Assure That Exposed Surfaces Of The Assemblies Will Be Flush With Concrete Surfaces.

GUARDRAIL ANCHOR ASSEMBLIES SHALL BE INSTALLED IN BOTH LEFT AND RIGHT RAILINGS AT EACH END OF ALL BRIDGES.

Bridge End Pavement Rail Shall Be Constructed And Paid For In Accordance With Section 813 Of The Standard Specifications.

4" Diameter weep hole to be placed in bridge end pavement rail where required to reduce ponding.

DESIGN DATA

Specifications.....A.A.S.H.T.O. 1992 & Int. Thru 1995
Concrete.....Class "AA"(4,000 psi)
Reinforcing.....ASTM A 615 Grade 60 (Fy = 60 ksi)

MISSISSIPPI DEPARTMENT OF TRANSPORTATION

42" BRIDGE END PAVEMENT RAIL (9" PAVEMENT)

PROJ. NO.: UPDATE
COUNTY: UPDATE

PRELIMINARY
NOT FOR
CONSTRUCTION

WORKING NUMBER
SDBEPR-1A-9

SHEET NUMBER
PG

BY | REVISION | DATE

FILENAME: SDBEPR-1A-9.dgn
DESIGN TEAM UPDATE CHECKED UPDATE DATE UPDATE

PLAN
ROADWAY DESIGN DIVISION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION

ØØ1:ØØ aNPM DGNFILENAME
MMDDYY