# Bridge end pavement quantities

**Project:** SYNTHETIC BE-1 QA
**County:** Not entered
**Prepared by:** Not entered
**Report date:** 2026-11-12

## Project quantity schedule

| End / station | Rail (in.) | Pavement (SY) | Joint (LF) | Grooving (SY) | 32 in. rail (LF) | 42 in. rail (LF) |
|---|---|---|---|---|---|---|
| **1** 100+00 | 0 | 62.50 | 35.36 | 62.50 | 0.00 | 0.00 |
| **2** 101+00 | 32 | 67.08 | 37.95 | 63.94 | 20.00 | 0.00 |
| **3** 102+00 | 42 | 67.50 | 38.18 | 64.17 | 0.00 | 20.00 |
| **4** 100+00 | 0 | 62.50 | 35.36 | 62.50 | 0.00 | 0.00 |
| **5** 101+00 | 32 | 67.08 | 37.95 | 63.94 | 20.00 | 0.00 |
| **6** 102+00 | 42 | 67.50 | 38.18 | 64.17 | 0.00 | 20.00 |
| **7** 100+00 | 0 | 62.50 | 35.36 | 62.50 | 0.00 | 0.00 |
| **8** 101+00 | 32 | 67.08 | 37.95 | 63.94 | 20.00 | 0.00 |
| **9** 102+00 | 42 | 67.50 | 38.18 | 64.17 | 0.00 | 20.00 |
| **10** 100+00 | 0 | 62.50 | 35.36 | 62.50 | 0.00 | 0.00 |
| **11** 101+00 | 32 | 67.08 | 37.95 | 63.94 | 20.00 | 0.00 |
| **12** 102+00 | 42 | 67.50 | 38.18 | 64.17 | 0.00 | 20.00 |
| **Total · 12 ends** | | **788.32** | **445.96** | **762.44** | **80.00** | **80.00** |

SY = square yards; LF = linear feet. Project totals sum the two-decimal quantities for each end. Each record is counted once.

SDBE-1A shows a 1 in. bridge-end joint. BE-1 uses a different bridge-seat detail; confirm project applicability.

32/42 in. rail options follow SDBE-1A and the SDBEPR detail families. Other plan sets use different rails; confirm the project detail.

## End 1 · 100+00

**W1 / W2:** 12.00 / 12.00 ft

**WB / W:** 24.00 / 25.00 ft

**Bridge end pavement:** 62.50 SY

**Transverse grooving:** 62.50 SY


**42 in. rail:** 0.00 LF

**Skew / rail:** 45.00° / 0 in.

**A / B:** 10.00 / 35.00 ft

**Expansion joint:** 35.36 LF

**32 in. rail:** 0.00 LF

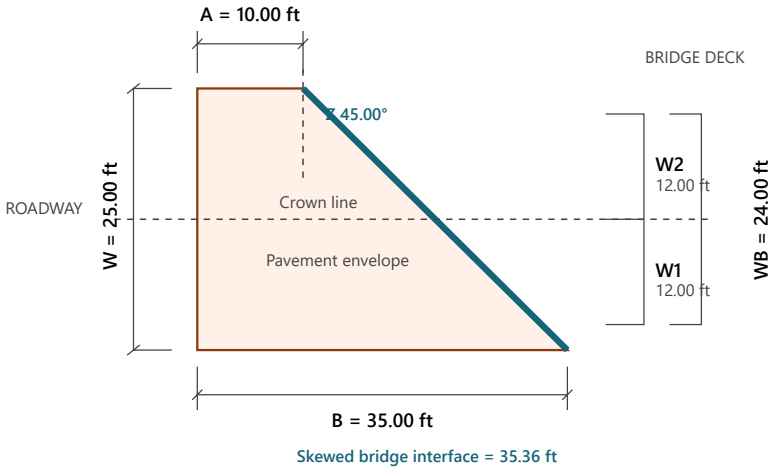


Schematic; dimensions govern. Side A uses the 10 ft minimum. Gross envelope 62.50 SY; paving deduction 0.00 SY; additional grooving deduction 0.00 SY.

## End 2 · 101+00

**W1 / W2:** 12.00 / 12.00 ft

**WB / W:** 24.00 / 26.83 ft

**Bridge end pavement:** 67.08 SY

**Transverse grooving:** 63.94 SY


**42 in. rail:** 0.00 LF

**Skew / rail:** 45.00° / 32 in.

**A / B:** 10.00 / 36.83 ft

**Expansion joint:** 37.95 LF

**32 in. rail:** 20.00 LF

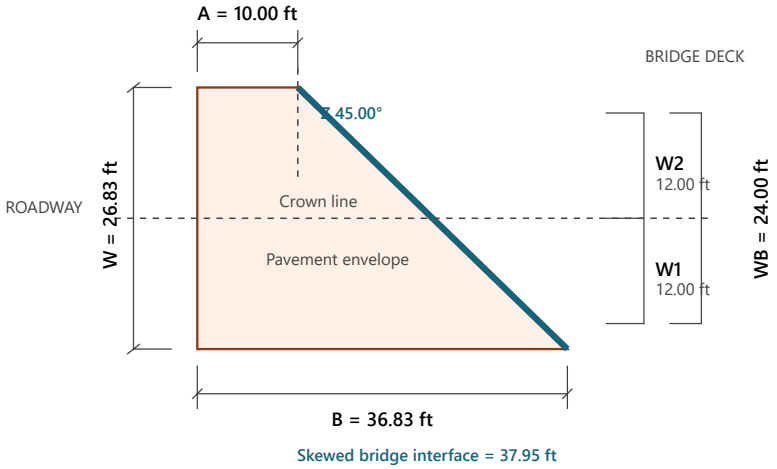


Schematic; dimensions govern. Side A uses the 10 ft minimum. Gross envelope 69.82 SY; paving deduction 2.73 SY; additional grooving deduction 3.15 SY.

## End 3 · 102+00

**W1 / W2:** 12.00 / 12.00 ft

**WB / W:** 24.00 / 27.00 ft

**Bridge end pavement:** 67.50 SY

**Transverse grooving:** 64.17 SY


**42 in. rail:** 20.00 LF

**Skew / rail:** 45.00° / 42 in.

**A / B:** 10.00 / 37.00 ft

**Expansion joint:** 38.18 LF

**32 in. rail:** 0.00 LF

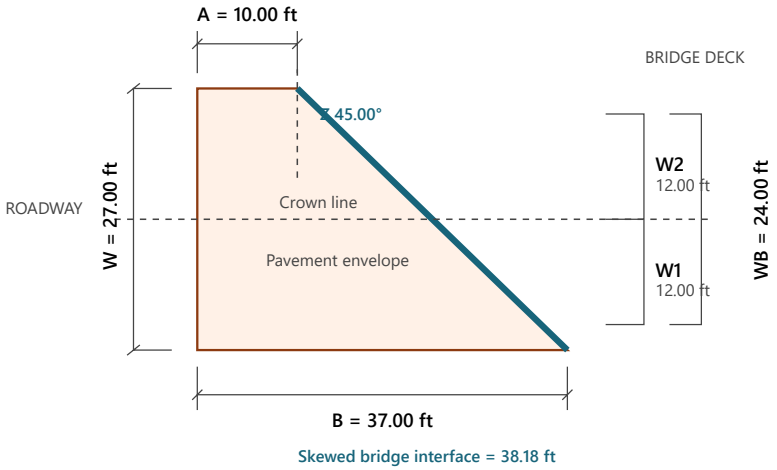


Schematic; dimensions govern. Side A uses the 10 ft minimum. Gross envelope 70.50 SY; paving deduction 3.00 SY; additional grooving deduction 3.33 SY.

## End 4 · 100+00

**W1 / W2:** 12.00 / 12.00 ft

**WB / W:** 24.00 / 25.00 ft

**Bridge end pavement:** 62.50 SY

**Transverse grooving:** 62.50 SY


**42 in. rail:** 0.00 LF

**Skew / rail:** 45.00° / 0 in.

**A / B:** 10.00 / 35.00 ft

**Expansion joint:** 35.36 LF

**32 in. rail:** 0.00 LF

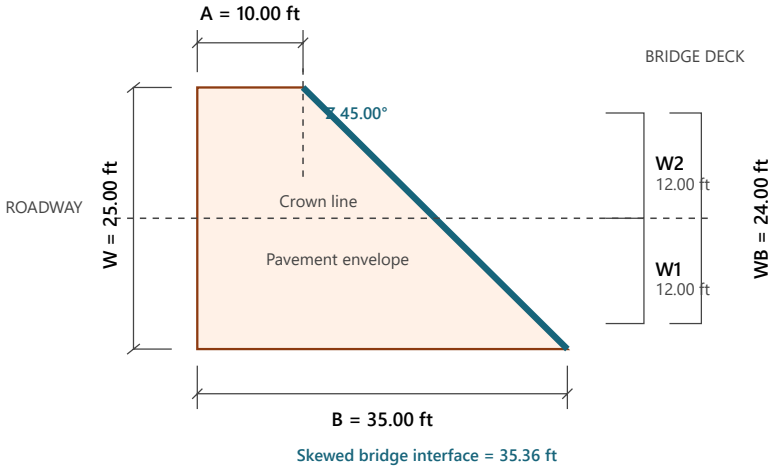


Schematic; dimensions govern. Side A uses the 10 ft minimum. Gross envelope 62.50 SY; paving deduction 0.00 SY; additional grooving deduction 0.00 SY.

## End 5 · 101+00

**W1 / W2:** 12.00 / 12.00 ft

**WB / W:** 24.00 / 26.83 ft

**Bridge end pavement:** 67.08 SY

**Transverse grooving:** 63.94 SY


**42 in. rail:** 0.00 LF

**Skew / rail:** 45.00° / 32 in.

**A / B:** 10.00 / 36.83 ft

**Expansion joint:** 37.95 LF

**32 in. rail:** 20.00 LF

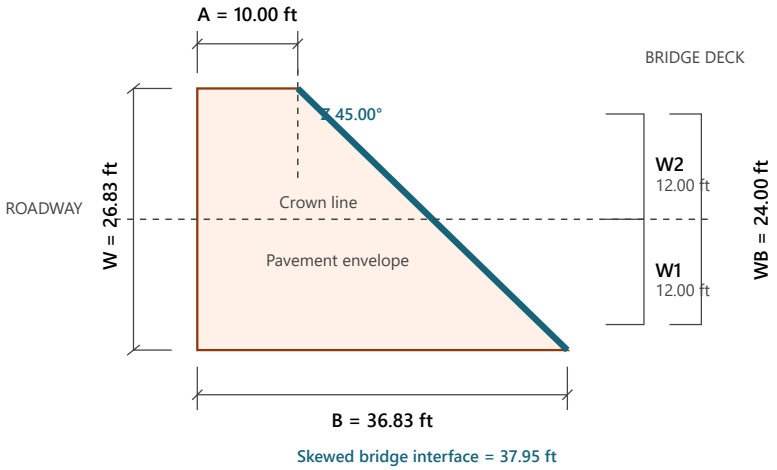


Schematic; dimensions govern. Side A uses the 10 ft minimum. Gross envelope 69.82 SY; paving deduction 2.73 SY; additional grooving deduction 3.15 SY.

## End 6 · 102+00

**W1 / W2:** 12.00 / 12.00 ft

**WB / W:** 24.00 / 27.00 ft

**Bridge end pavement:** 67.50 SY

**Transverse grooving:** 64.17 SY


**42 in. rail:** 20.00 LF

**Skew / rail:** 45.00° / 42 in.

**A / B:** 10.00 / 37.00 ft

**Expansion joint:** 38.18 LF

**32 in. rail:** 0.00 LF

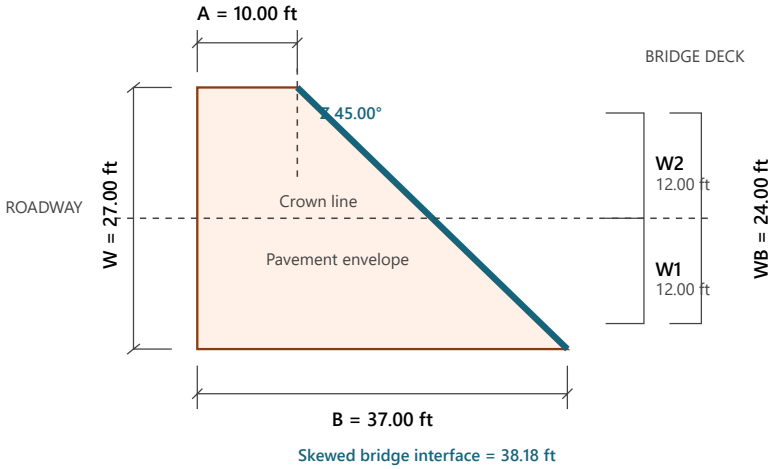


Schematic; dimensions govern. Side A uses the 10 ft minimum. Gross envelope 70.50 SY; paving deduction 3.00 SY; additional grooving deduction 3.33 SY.

## End 7 · 100+00

**W1 / W2:** 12.00 / 12.00 ft

**WB / W:** 24.00 / 25.00 ft

**Bridge end pavement:** 62.50 SY

**Transverse grooving:** 62.50 SY


**42 in. rail:** 0.00 LF

**Skew / rail:** 45.00° / 0 in.

**A / B:** 10.00 / 35.00 ft

**Expansion joint:** 35.36 LF

**32 in. rail:** 0.00 LF

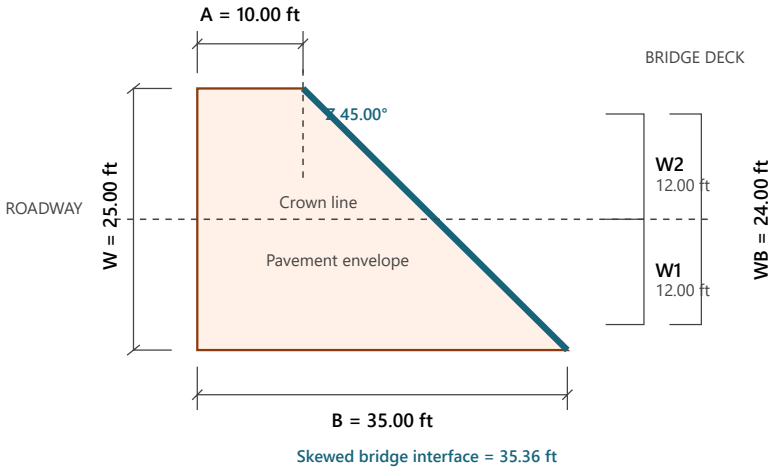


Schematic; dimensions govern. Side A uses the 10 ft minimum. Gross envelope 62.50 SY; paving deduction 0.00 SY; additional grooving deduction 0.00 SY.

## End 8 · 101+00

**W1 / W2:** 12.00 / 12.00 ft

**WB / W:** 24.00 / 26.83 ft

**Bridge end pavement:** 67.08 SY

**Transverse grooving:** 63.94 SY


**42 in. rail:** 0.00 LF

**Skew / rail:** 45.00° / 32 in.

**A / B:** 10.00 / 36.83 ft

**Expansion joint:** 37.95 LF

**32 in. rail:** 20.00 LF

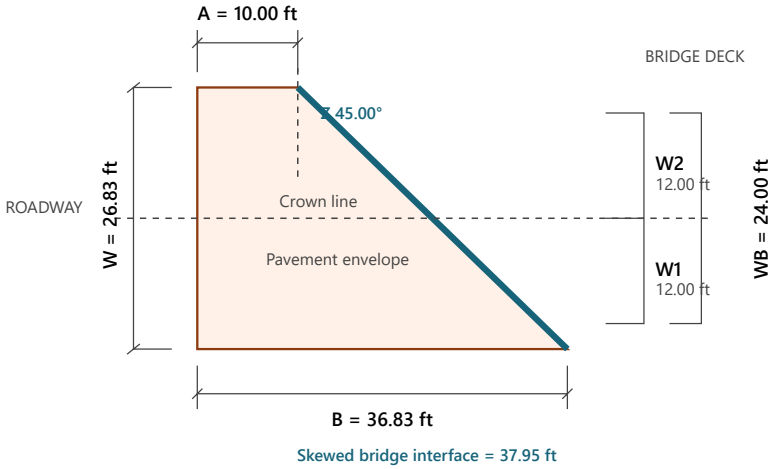


Schematic; dimensions govern. Side A uses the 10 ft minimum. Gross envelope 69.82 SY; paving deduction 2.73 SY; additional grooving deduction 3.15 SY.

## End 9 · 102+00

**W1 / W2:** 12.00 / 12.00 ft

**WB / W:** 24.00 / 27.00 ft

**Bridge end pavement:** 67.50 SY

**Transverse grooving:** 64.17 SY


**42 in. rail:** 20.00 LF

**Skew / rail:** 45.00° / 42 in.

**A / B:** 10.00 / 37.00 ft

**Expansion joint:** 38.18 LF

**32 in. rail:** 0.00 LF

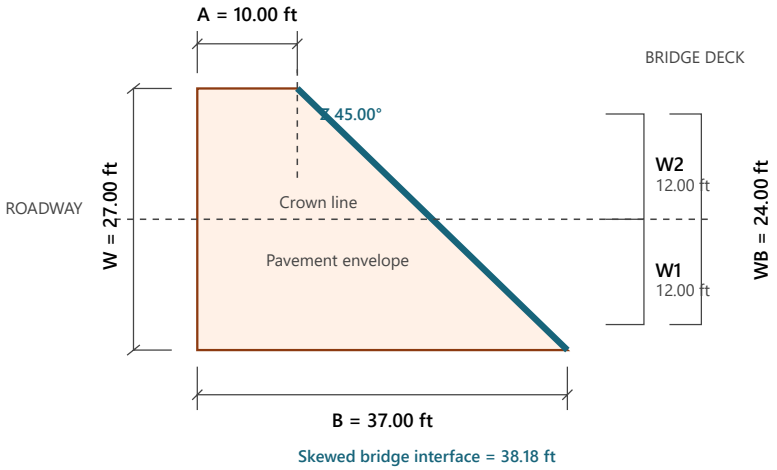


Schematic; dimensions govern. Side A uses the 10 ft minimum. Gross envelope 70.50 SY; paving deduction 3.00 SY; additional grooving deduction 3.33 SY.

## End 10 · 100+00

**W1 / W2:** 12.00 / 12.00 ft

**WB / W:** 24.00 / 25.00 ft

**Bridge end pavement:** 62.50 SY

**Transverse grooving:** 62.50 SY


**42 in. rail:** 0.00 LF

**Skew / rail:** 45.00° / 0 in.

**A / B:** 10.00 / 35.00 ft

**Expansion joint:** 35.36 LF

**32 in. rail:** 0.00 LF

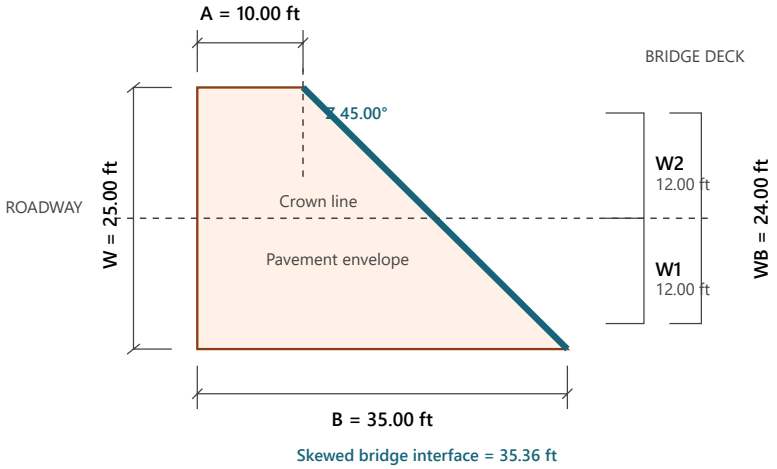


Schematic; dimensions govern. Side A uses the 10 ft minimum. Gross envelope 62.50 SY; paving deduction 0.00 SY; additional grooving deduction 0.00 SY.

## End 11 · 101+00

**W1 / W2:** 12.00 / 12.00 ft

**WB / W:** 24.00 / 26.83 ft

**Bridge end pavement:** 67.08 SY

**Transverse grooving:** 63.94 SY


**42 in. rail:** 0.00 LF

**Skew / rail:** 45.00° / 32 in.

**A / B:** 10.00 / 36.83 ft

**Expansion joint:** 37.95 LF

**32 in. rail:** 20.00 LF

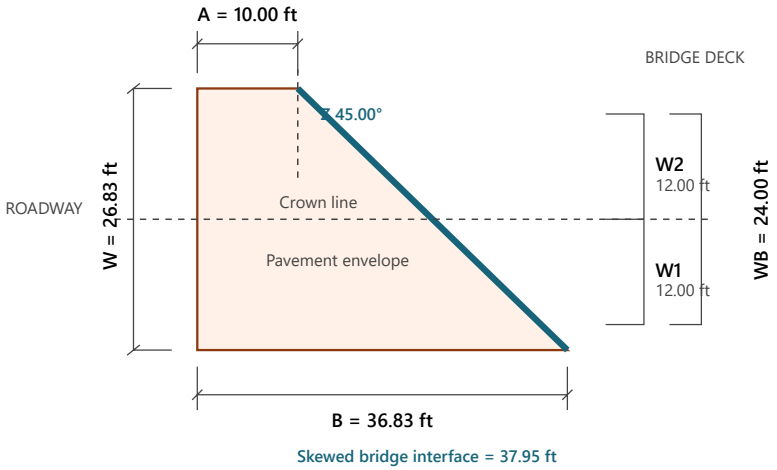


Schematic; dimensions govern. Side A uses the 10 ft minimum. Gross envelope 69.82 SY; paving deduction 2.73 SY; additional grooving deduction 3.15 SY.

## End 12 · 102+00

**W1 / W2:** 12.00 / 12.00 ft

**WB / W:** 24.00 / 27.00 ft

**Bridge end pavement:** 67.50 SY

**Transverse grooving:** 64.17 SY


**42 in. rail:** 20.00 LF

**Skew / rail:** 45.00° / 42 in.

**A / B:** 10.00 / 37.00 ft

**Expansion joint:** 38.18 LF

**32 in. rail:** 0.00 LF

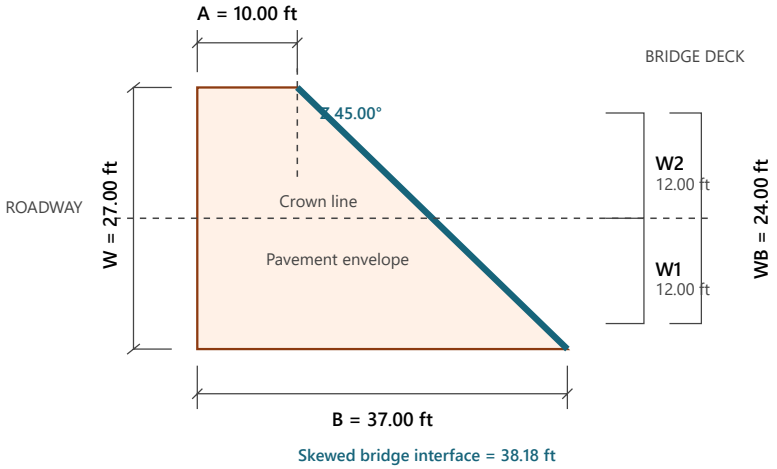


Schematic; dimensions govern. Side A uses the 10 ft minimum. Gross envelope 70.50 SY; paving deduction 3.00 SY; additional grooving deduction 3.33 SY.

Calculation basis: recovered MDOT Bridge End Pavement, Version AI 1.2; geometry matches SDBE-1A. Nonnegative skew magnitude below 90° is required. W1/W2 datum and applicability require project-plan review. Diagrams are not construction details.